

AC890

Modular AC Drives for Systems

AC V/F, VECTOR AND SERVO MOTOR CONTROL
COMMON BUS SUPPLIES AND INVERTERS
COORDINATED SYSTEM CONTROL




Induction motors

Velocity and Torque Control

Servo motors

Motion and Position Control

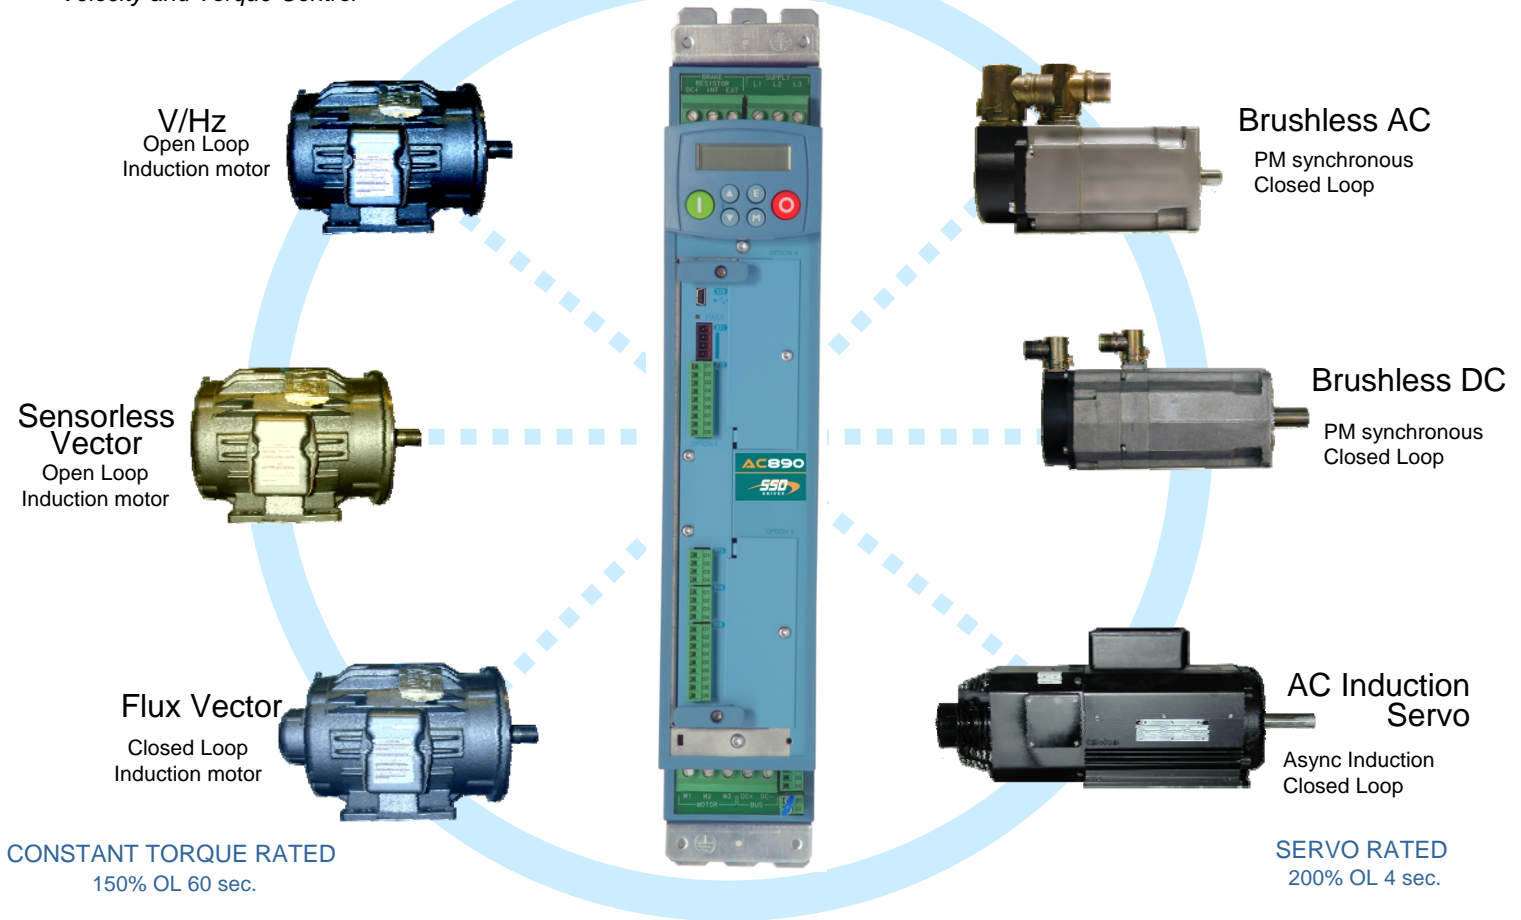


890 is the drive for a wide range of motor types and sizes, through easy to use, pre-defined parameter set-up macros

No Matter What Your Application.....

AC890 Drive is The Right Solution!

Control and Option Boards

ONE MAIN CONTROL BOARD

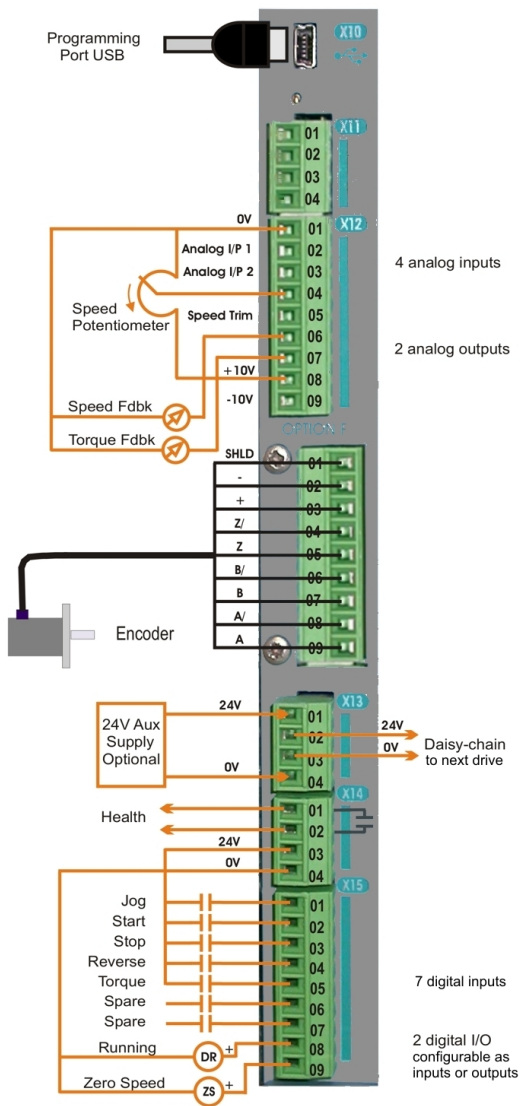

LOWEST COST PER NODE!

DIRECT PROCESSING COMMUNICATIONS


HIGH SPEED
LOW COST

Option slot for:

- Expansion I/O card
- Follower board (encoder and resolver types)

CONTROL BOARD

- V/Hz, SV, Vector
- Servo control
- On-board I/O

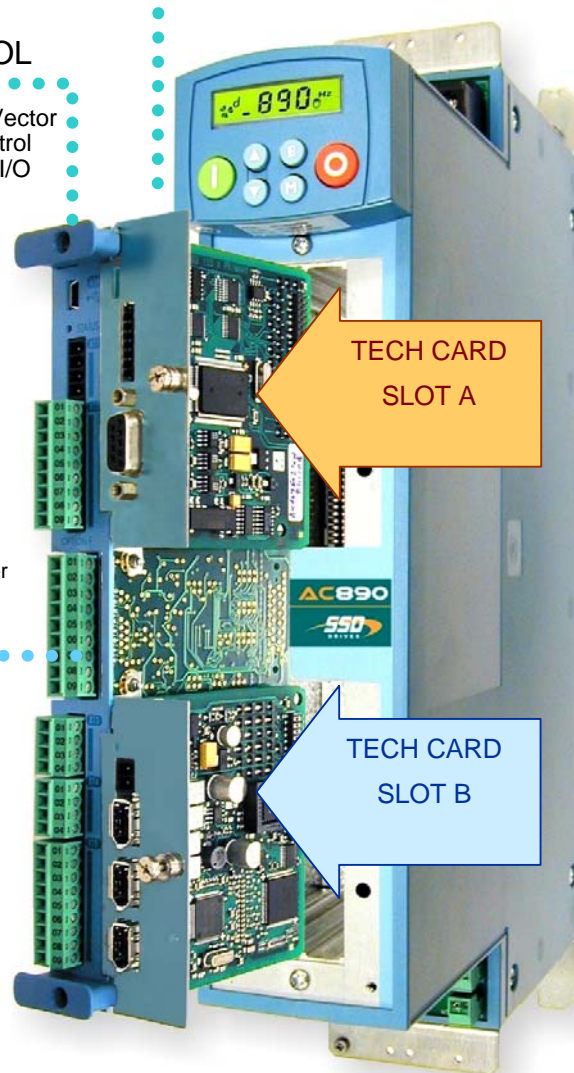

FIELDBUS COMMS (2 locations)

- DeviceNet
- Profibus
- ControlNet
- Ethernet
- ModBus
- CAN
- Firewire


Why Firewire?

As defined by IEEE 1394, FireWire delivers 400 Mbps performance, 3 orders of magnitude faster than most industrial serial buses and almost 1,000 times faster than other fieldbus networks.

FireWire supports full communications directly from node to node. By bypassing varying delays due to central processing loads, 1394 is fast and deterministic in node-to-node communications, enabling high-performance LINK VM embedded applications without any PC presence.



STAND ALONE

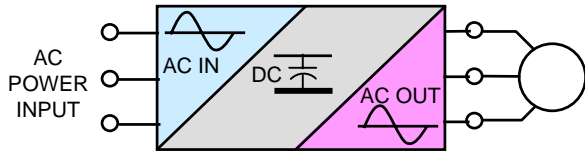

a complete AC-input-to-AC motor output controller complete with power input and output terminals, and access to all feedback and networking options

Stand Alone (Complete Drive)



1 - 10 HP
.75 - 7.5 KW

15 - 20 HP
11 - 15 KW

25 - 40 HP
18 - 30 KW

Stand Alone Drives come complete with a built-in Dynamic Brake switch with provisions to add an external resistor.

COMMON BUS

Supply Section



up to 45 HP
up to 30 KW

50 - 135 HP
37 - 90 KW

Drive Section




1 - 10 HP
.75 - 7.5 KW

15 - 20 HP
11 - 15 KW


25 - 40 HP
18 - 30 KW

Common Bus Drives (CD) are individual motor output sections that easily connect to a Common Bus Supply (CS) with a unique, easy-to-install DC busbar system

- Integral fusing provides branch protection
- No power interlocks or input reactors required
- Each CD provides access to all feedback and networking options

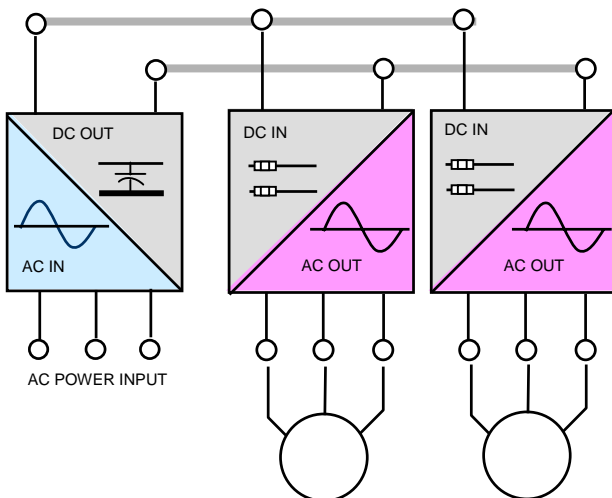

example of Common Bus setup

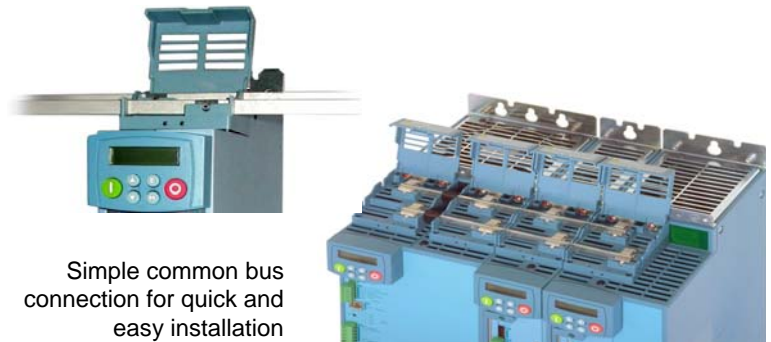

Simple common bus connection for quick and easy installation

CONVENTIONAL DRIVE SYSTEM



10-Drive System

- ✓ Circuit Breakers
- ✓ Fusing
- ✓ Line Reactors
- ✓ Contactors

Component Reduction

- ✓ Enclosure Size
- ✓ Engineering
- ✓ Wiring
- ✓ Other Components
- ✓ Switchgear

50% Space Reduction


AC890 MODULAR DRIVE SYSTEM



10-Drive System

Input Power Configurations

Parallel Input Modules and multi-pulse configurations*

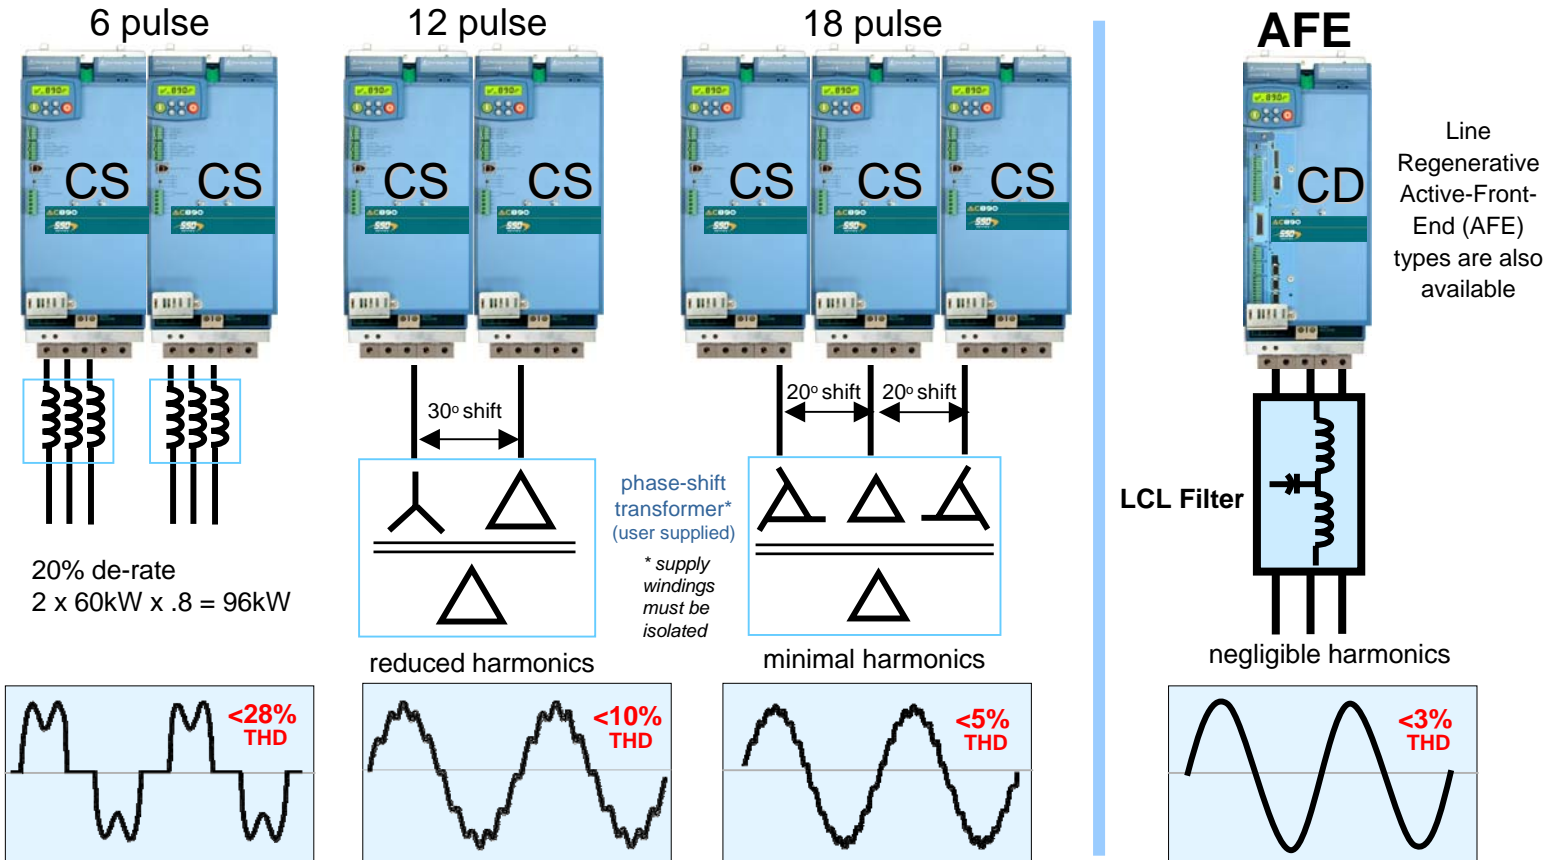


INPUT CURRENT WAVEFORMS

Line Regenerative Active-Front-End (AFE) types are also available

Configuration and Monitoring

Fast-and-easy project creation and online monitoring tool

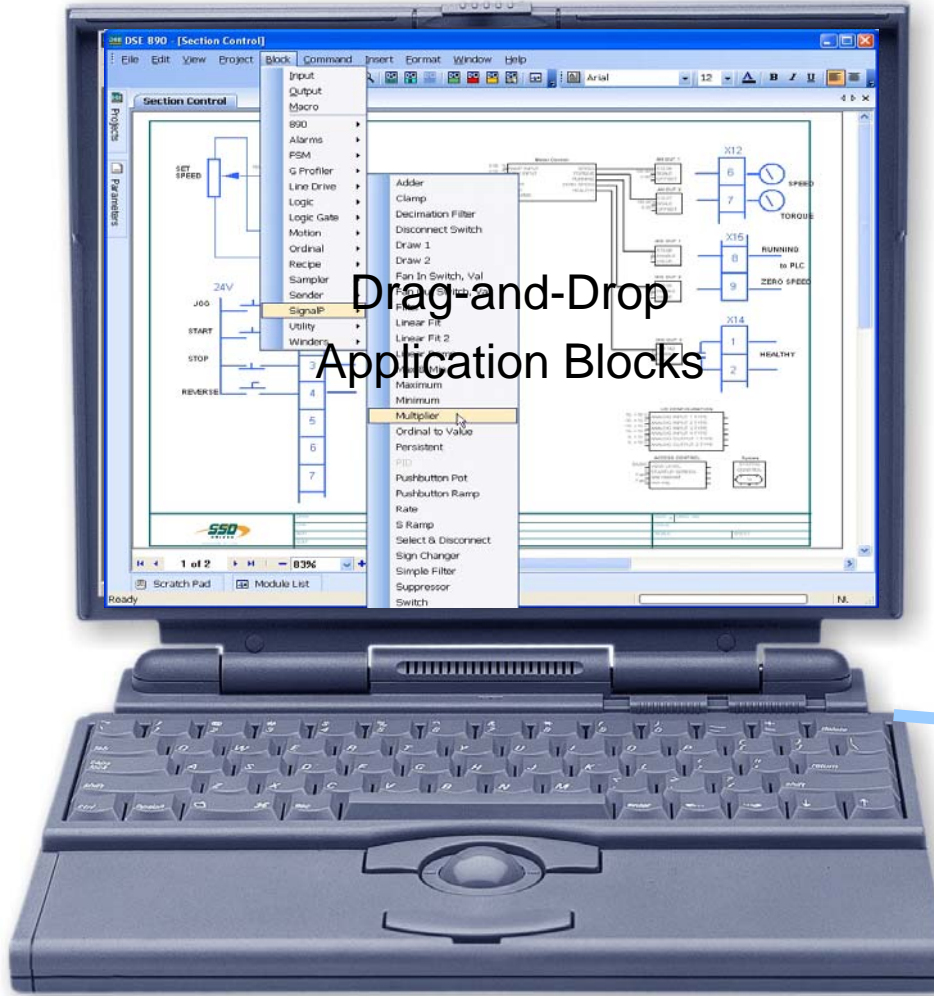


- Build a custom drive system in minutes!



- No costly special firmware builds


AC890 Architecture

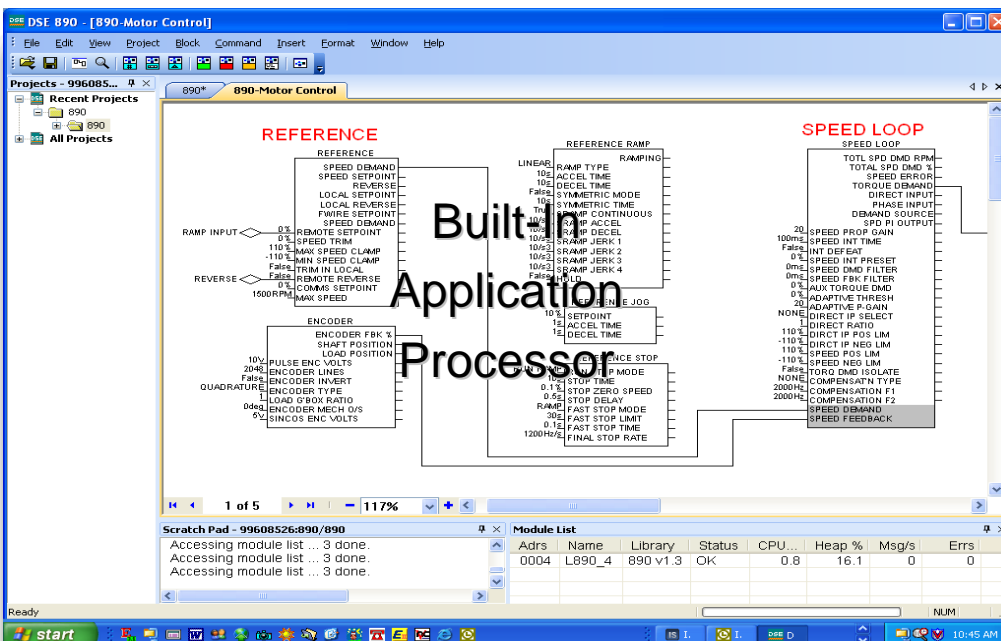

Totally Flexible LINK Block Diagram

- 32 bit architecture
- Multiple Configuration Interface
- Graphical Programmability
- Object Oriented Software
- Fully Deterministic

Infinite Possibilities!

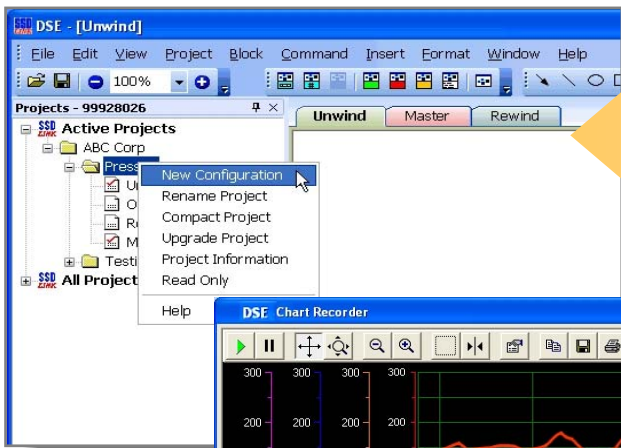

Set up parameters
& create projects



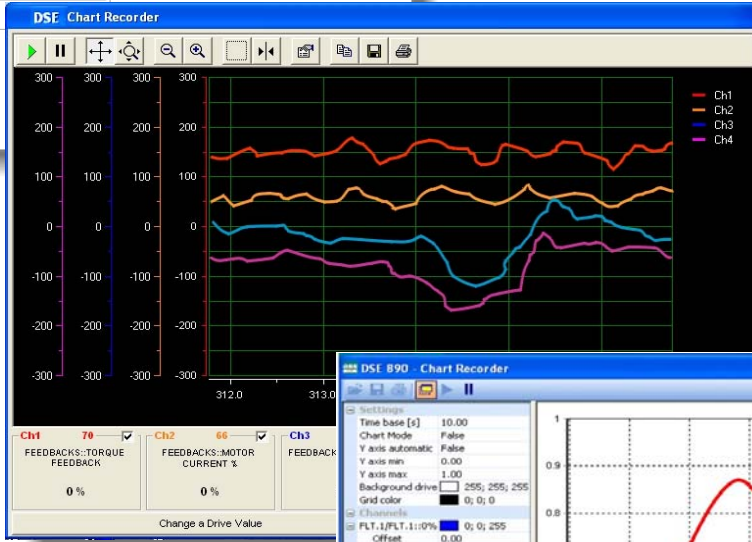


Chart variables
on-line

Monitoring and
on-line tuning

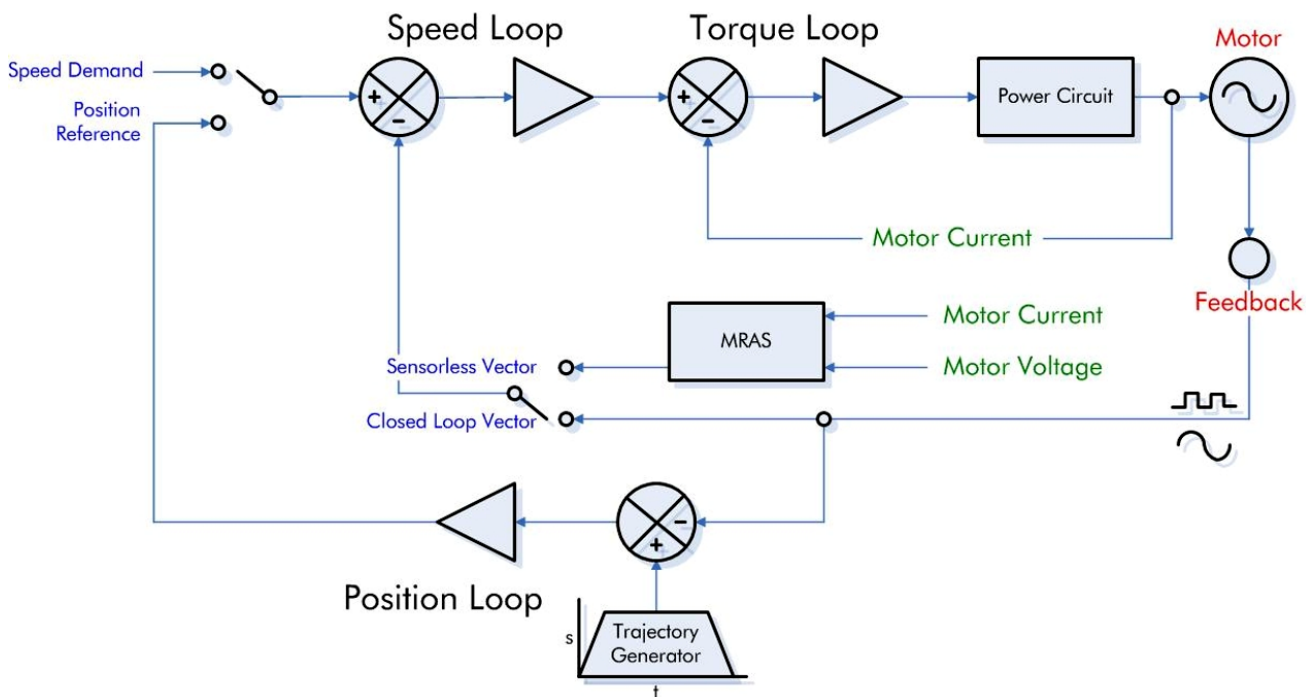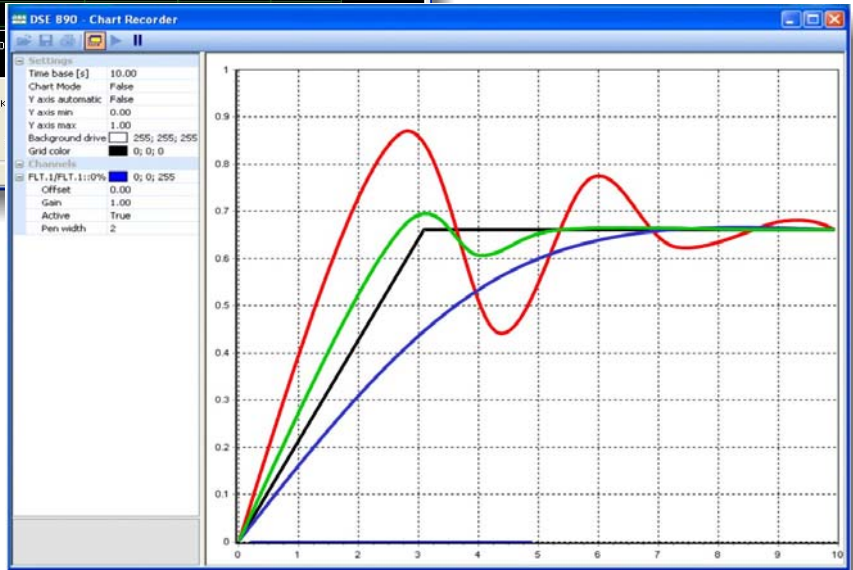

AC890 can deliver the right level of performance to precisely match your application needs. By offering 2 different performance level packages, your AC890 system has the flexibility to meet all of your demands.

ADVANCED PERFORMANCE

Standard Features, plus: Motion control firmware with added position loop, motion control function blocks, move incremental, move absolute, move home, line drive master ramp and section control, winder blocks (SPW, CPW), full function PID, state machine, and others.

HIGH PERFORMANCE

All Advanced Performance features, plus: Library of pre-engineered application specific LINK VM function blocks such as: Shaftless Printing, precision camming, cut-to-length, precision winding, traversing and others.

Shaftless Registration Control Solutions for Printing

Mechanical line shafts are easily replaced with individual AC890 drives, capable of precise synchronization and printing registration adjustment to each section, guaranteeing perfect alignment of each color.

AC890 HIGH PERFORMANCE LEVEL features a library of pre-engineered application specific LINK VM function blocks, including shaftless printing, precision camming, cut-to-length, precision winding, traversing and others.




HMI Touchscreen with Firewire



- HIGH SPEED: 125uS cycle time
- Time synchronization
- 400MB network speed
- 10 - 40x more performance than SERCOS
- Already the choice for 3-4 major servo motion control suppliers




Firewire provides *synchronized data transfer* for Print Registration Control

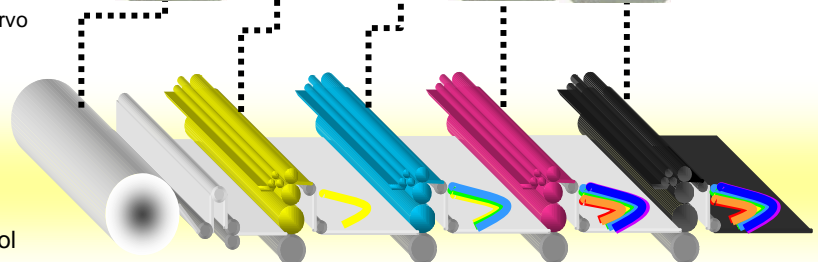


ACTIVE FRONT ENDS for CLEAN POWER

Common Bus Drive sections can also be configured as ACTIVE-FRONT-END INPUT SECTIONS, providing true line-regenerative 4-quadrant control with no harmonics

- Fully Line Regenerative
- Low Power Line Harmonics
- UNITY POWER FACTOR




Typical 30kW (40HP) Line Regenerative System

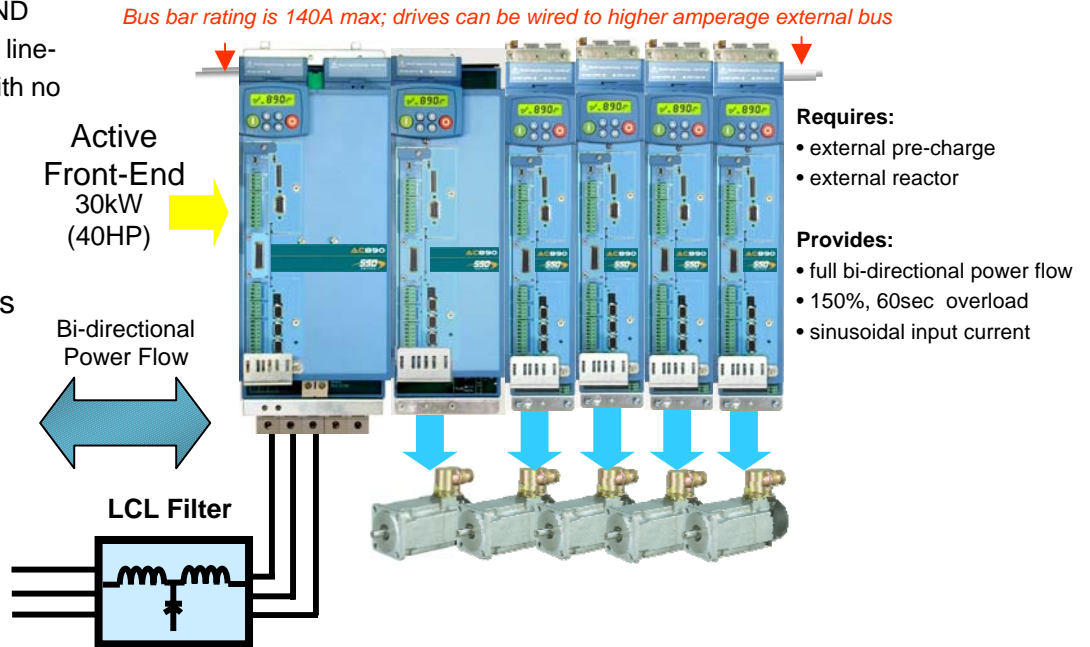

Larger AC890 systems


can be matched with separate higher-power Active Front End units. Multiple rows of AC890 Common Bus Drives are bridged together using Common Bus Adapter modules.

Typical 75kW (100HP) Line Regenerative System

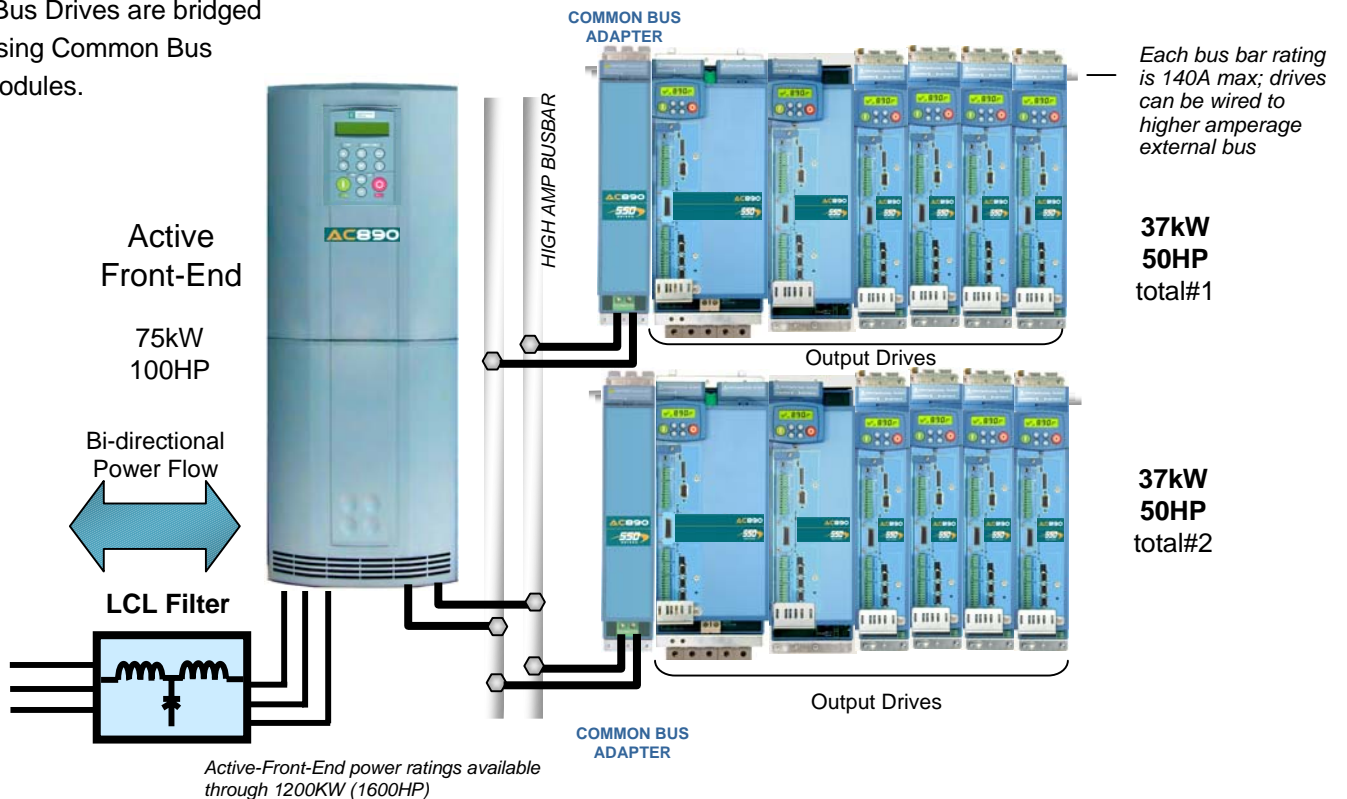



Bookshelf Frames

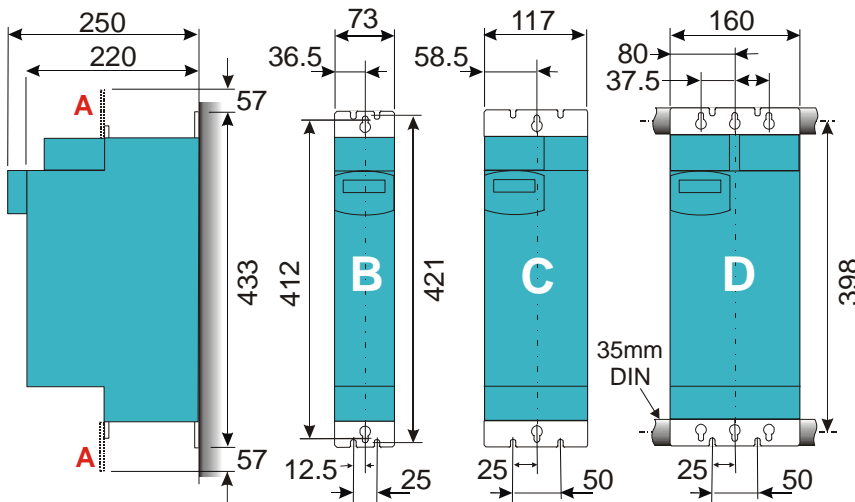


Frame Size	Overall Dimensions			Mounting Centers		
	H	W	D	H1	H2	W2
B	434 (17.1)	72 (2.9)	258.5 (10.2)	414 (16.3)	-	-
C	434 (17.1)	116 (4.6)	258.5 (10.2)	414 (16.3)	-	-
D	434 (17.1)	160 (6.3)	258.5 (10.2)	414 (16.3)	-	-
E	668 (26.3)	257 (10.1)	312 (12.3)	630 (24.8)	-	150 (5.90)
F	720 (28.3)	257 (10.1)	349 (13.74)	700 (27.5)	-	150 (5.90)
G	1042 (41.0)	456 (17.9)	465 (18.3)	300 (11.8)	16 (0.6)	420 (16.5)
H	1177 (46.3)	572 (22.5)	465 (18.3)	300 (11.8)	16 (0.6)	536 (21.1)
J	1288 (50.7)	677 (26.6)	465 (18.3)	300 (11.8)	16 (0.6)	641 (25.2)
K*	2007 (79)	3251 (128)	610 (24)	-	-	-
K**	2007 (79)	3658 (144)	610 (24)	-	-	-

Dimensions are in millimeters (inches)

K-frame dimensions include NEMA 12 ventilated enclosures with flange disconnect option

* 6-pulse input (12-pulse optional)

** 6-pulse input (18-pulse optional)

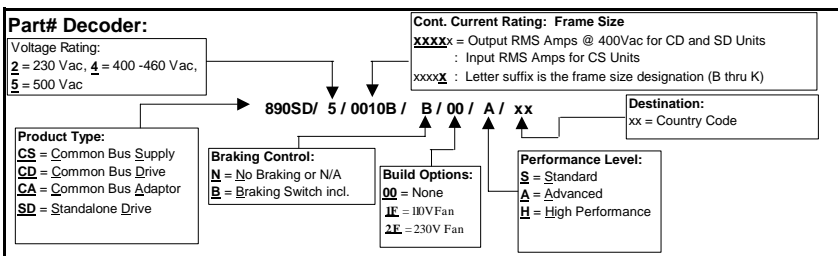

AC890 Common Bus Supplies				
230 - 500 VAC (+/- 10%) 3-phase				
Part Number	HP @460Vac	HP @230Vac	Input Amps	Frame
890CS/5/0032B/B/00/N/EN	25	10	32	B
890CS/5/0054B/B/00/N/EN	45	20	54	B
890CS/5/0108D/B/00/N/EN	75	40	108	D
890CS/5/0162D/B/00/N/EN	135	60	162	D

AC890 Common Bus Drives			
used with 208 - 230 VAC (+/-10%) Supplies - 3 phase (890CS)			
Part Number	HP@230Vac	Output Amps @230Vac	Frame
890CD/2/0003B/N/00/S/US	0.75	3.0	B
890CD/2/0005B/N/00/S/US	1.5	5.5	B
890CD/2/0007B/N/00/S/US	2	7.0	B
890CD/2/0011B/N/00/S/US	3	11	B
890CD/2/0016B/N/00/S/US	5	16.5	B
890CD/2/0024C/N/00/S/US	7.5	24	C
890CD/2/0030C/N/00/S/US	10	30	C

AC890 Common Bus Drives			
used with 380 - 500 (+/- 10%) VAC Supplies - 3 phase (890CS)			
Part Number	HP@460Vac	Output Amps @460Vac	Frame
890CD/5/0002B/N/00/S/US	1	2.0	B
890CD/5/0003B/N/00/S/US	1.5	3.5	B
890CD/5/0004B/N/00/S/US	2	4.5	B
890CD/5/0006B/N/00/S/US	3	5	B
890CD/5/0010B/N/00/S/US	5	8	B
890CD/5/0012B/N/00/S/US	7.5	12	B
890CD/5/0016B/N/00/S/US	10	14	B
890CD/5/0024C/N/00/S/US	15	24	C
890CD/5/0030C/N/00/S/US	20	27	C
890CD/5/0039D/N/00/S/US	25	35	D
890CD/5/0045D/N/00/S/US	30	40	D
890CD/5/0059D/N/00/S/US	40	52	D
890CD/4/0073E/N/00/S/US	50	73	E
890CD/4/0087E/N/00/S/US	60	87	E
890CD/4/0105F/N/1F/S/US	75	100	F
890CD/4/0145F/N/1F/S/US	100	130	F
890CD/4/0156F/N/1F/S/US	125	156	F
890CD/4/0180F/N/1F/S/US	150	180	F

Note 1: The braking switch is optional on these models, please refer to figure one (Dynamic Braking Field) for guidance.

Note 2: The 890 comes in three performance level configurations, Standard, Advanced and High. The part#'s shown above 890SD/x/xxxxx/x/xx/S/xx are for Standard Performance models, for Advanced models replace the Performance Level field designator with an A, and for High Performance models use an H.

F



G, H, J



K



AC890 Stand-alone Drives

208-240 VAC (+/- 10%) Input 3-phase

Part Number	HP@230Vac	Output Amps @230Vac	Frame
890SD/2/0003B/B/00/S/US	0.75	3.0	B
890SD/2/0005B/B/00/S/US	1.5	5.5	B
890SD/2/0007B/B/00/S/US	2	7.0	B
890SD/2/0011B/B/00/S/US	3	11	B
890SD/2/0016B/B/00/S/US	5	16.5	B
890SD/2/0024C/B/00/S/US	7.5	24	C
890SD/2/0030C/B/00/S/US	10	30	C

AC890 Stand-alone Drives

380 - 500 VAC (+/- 10%) Input - 3 Phase: Frames B thru D

380 - 460 VAC (+/- 10%) Input - 3 Phase: Frames E and Higher

Part Number	HP@460Vac	Output Amps @460Vac	Frame
890SD/5/0002B/B/00/S/US	1	2.0	B
890SD/5/0003B/B/00/S/US	1.5	3.5	B
890SD/5/0004B/B/00/S/US	2	4.5	B
890SD/5/0006B/B/00/S/US	3	5	B
890SD/5/0010B/B/00/S/US	5	8	B
890SD/5/0012B/B/00/S/US	7.5	12	B
890SD/5/0016B/B/00/S/US	10	14	B
890SD/5/0024C/B/00/S/US	15	24	C
890SD/5/0030C/B/00/S/US	20	27	C
890SD/5/0039D/B/00/S/US	25	35	D
890SD/5/0045D/B/00/S/US	30	40	D
890SD/5/0059D/B/00/S/US	40	52	D
890SD/4/0073E/B/00/S/US	50	73	E
890SD/4/0087E/B/00/S/US	60	87	E
890SD/4/0105F/B/1F/S/US	75	100	F
890SD/4/0145F/B/1F/S/US	100	130	F
890SD/4/0156F/B/1F/S/US	125	156	F
890SD/4/0180F/B/1F/S/US	150	180	F
890SD/4/0216G/(note1)/1F/S/US	175	216	G
890SD/4/0250G/(note1)/1F/S/US	200	250	G
890SD/4/0316G/(note1)/1F/S/US	250	316	G
890SD/4/0361G/(note1)/1F/S/US	300	361	G
890SD/4/0420H/(note1)/1F/S/US	350	420	H
890SD/4/0480H/(note1)/1F/S/US	400	480	H
890SD/4/0520H/(note1)/1F/S/US	450	520	H
890SD/5/0590J/(note1)/1F/S/US	500	590	J
890SD/5/0685K/(note1)/1F/S/US	600	685	K (2xG)
890SD/5/0798K/(note1)/1F/S/US	700	798	K (2xH)
890SD/5/0988K/(note1)/1F/S/US	800	988	K (2xH)
890SD/5/1028K/(note1)/1F/S/US	900	1028	K (3xG)
890SD/5/1120K/(note1)/1F/S/US	1000	1120	K (2xJ)
890SD/5/1197K/(note1)/1F/S/US	1000	1197	K (3xH)
890SD/5/1482K/(note1)/1F/S/US	1300	1482	K (3xH)
890SD/5/1681K/(note1)/1F/S/US	1500	1681	K (3xJ)

AC890 Specifications and Operating Conditions

Overload

Constant Torque Ratings: 150% for 60 seconds, 180% for 1 second
Servo Torque Ratings: Consult Factory

Output Frequency

0 - 1000 Hz; V/Hz mode
0 - 350 Hz; closed loop vector mode
0 - 120 Hz; sensorless vector mode

Switching Frequency

Frame size B - D: 3 KHz (standard), 4 or 8 KHz (servo)
Frame size E: 3 or 6 KHz
Frame size F: 3 KHz
Frame size G - H: 2.5 KHz
Frame size J: 2 KHz

- some exceptions apply; all with audibly silent switching frequency

Dynamic Braking

Frame size B - F Stand Alone types have built-in switch with option for external resistor
Frame size B & D CS modules have built-in switch with option for external resistor
Frame size G - K have option for external brake switch and external resistor

Operating Temperature

0°C to 45°C (32°F to 113°F) through frame F
0°C to 40°C (32°F to 104°F) frames G and above

Product Enclosure Rating

IP20 - UL (c-UL) Open Type (North America/Canada)
Suitable for cubicle mount only

Enclosure Rating

Enclosure to provide 15dB attenuation to radiated emissions between 30-100MHz. It must also need a security tool for opening

Humidity

Maximum 90% relative humidity at 40°C non-condensing

Atmosphere

Non flammable, non corrosive and dust free

Climatic Conditions

Class 3k3, as defined by EN50178 (1998)

Vibration

Test Fc of EN60068-2-6

STANDARDS

Pollution Degree

Pollution Degree II (non-conductive pollution, except for temporary condensation)


Europe

When fitted inside an enclosure, this product conforms with the Low Voltage Directive 73/23/EEC with amendment 93/68/EEC, Article 13 and Annex III using EN50178 (1998) to show compliance.

North America/ Canada

Complies with the requirements of UL508C as an open-type drive.




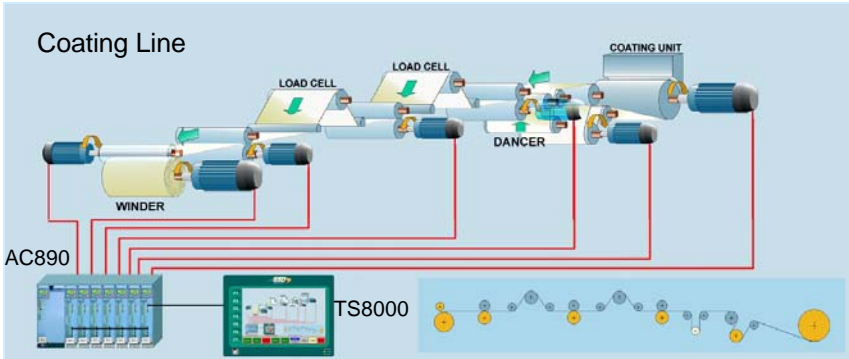


COATING




FireWire
(IEEE1394)


CUT TO LENGTH

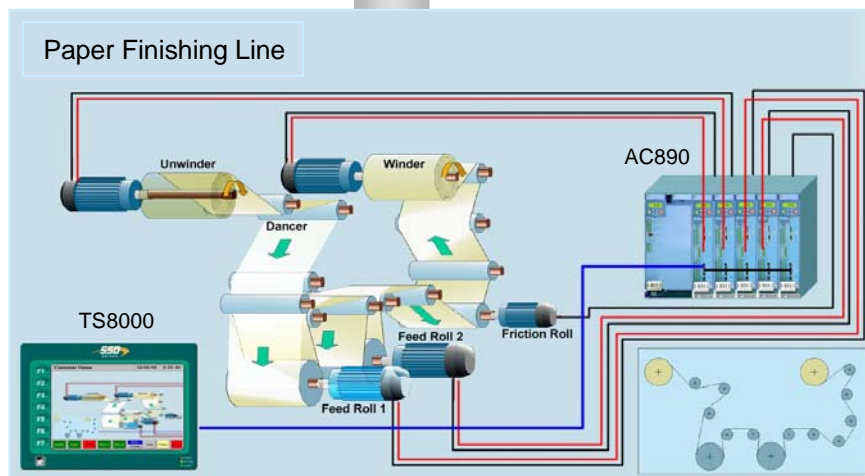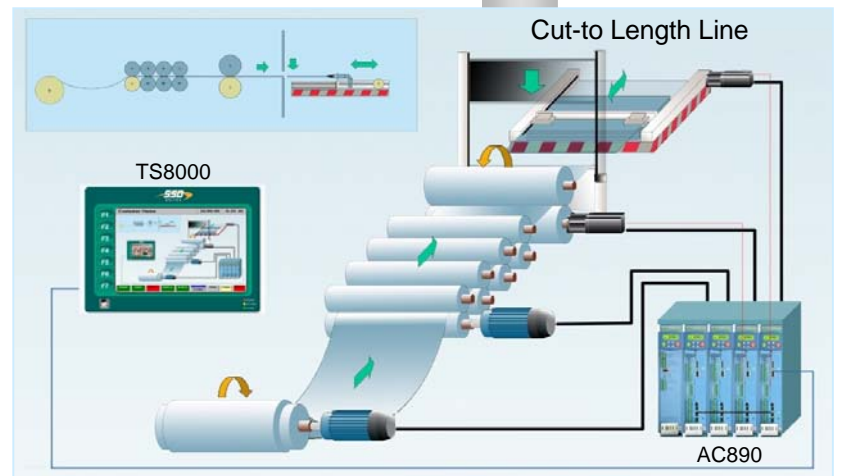

PAPER FINISHING

ROTARY CUTTING

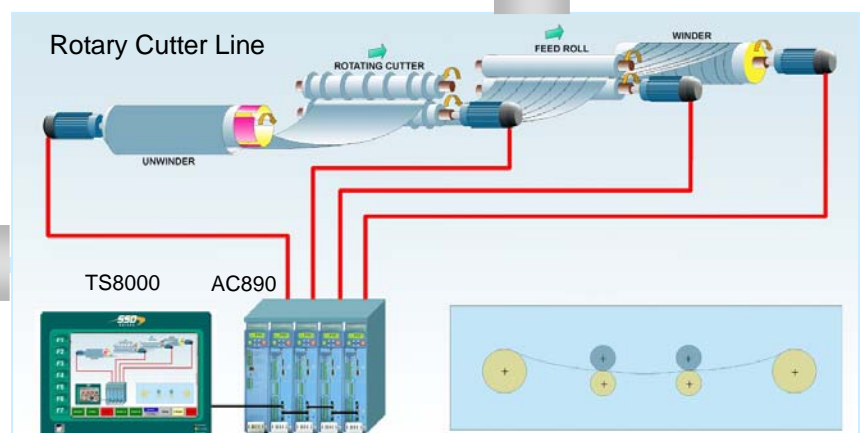

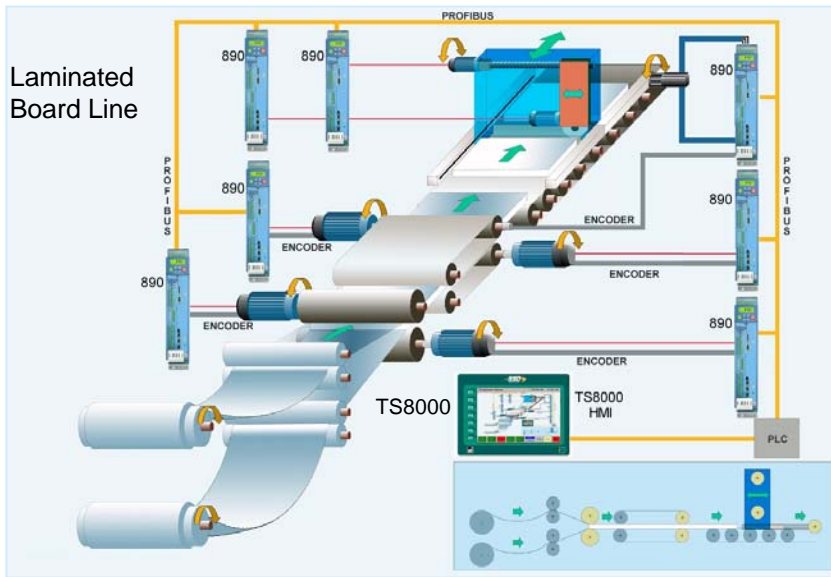


LAMINATING




FireWire
(IEEE1394)


CORRUGATING AND CUTTING

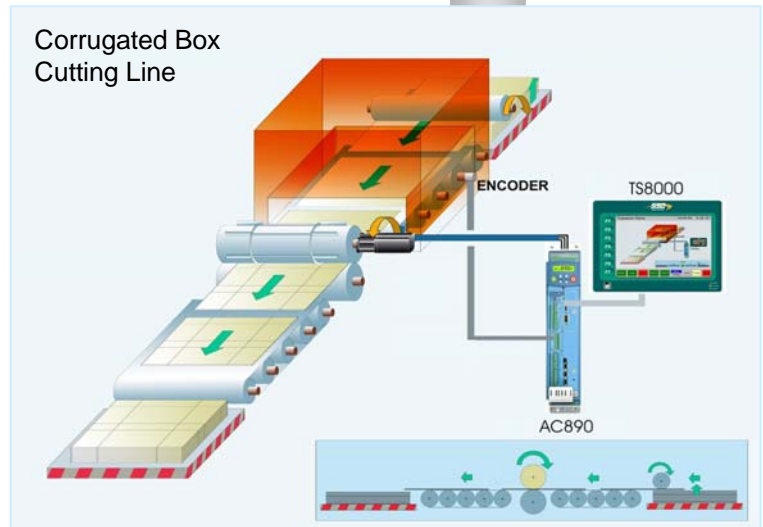

PRINTING

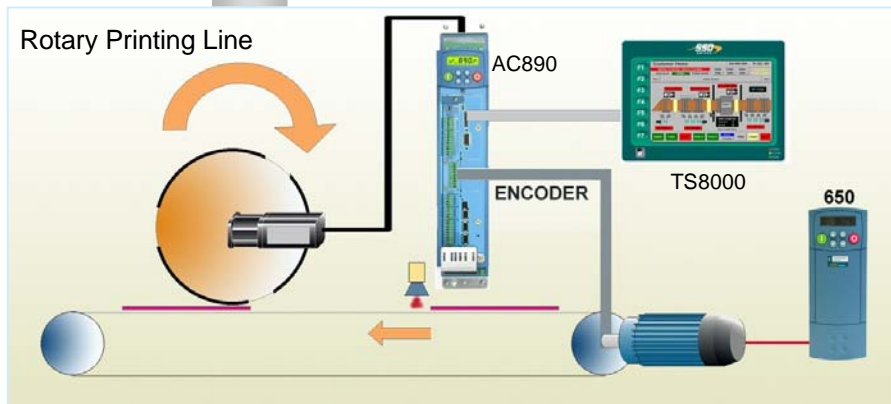

FINISHING

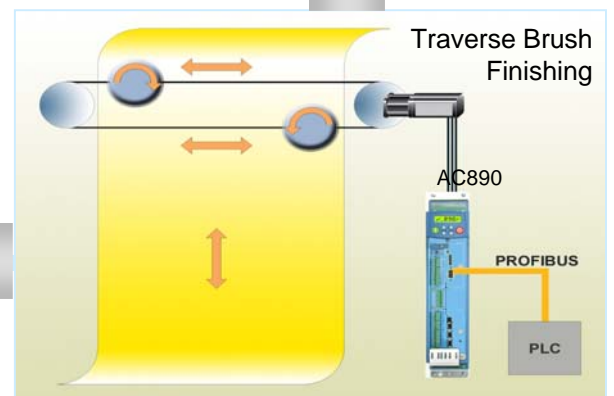

1 Duct Components

Provides a means of ventilating air directly through the heat sinks and out of the cabinet

2 Keypad Options

Allow you to view your drive parameters on an alpha numeric keypad. Remote mount your existing keypad or an alpha numeric keypad.

3 Feedback Options

Increase your drive's performance by adding speed/position feedback options.

4 Communications

Send and receive data from a wide variety of PLC's and operator stations.

5 Bus Bars


Allow you to join common drives, common supplies and common adapter modules together. Provides 140A max of powering and load sharing between units.

6 Software

Program and configure, chart, monitor, save and clone your drives.

7 Common Adapter

Effortlessly join rows of drives together. The RT version also allows you to add additional capacitance to a system, providing greater ride through capability.

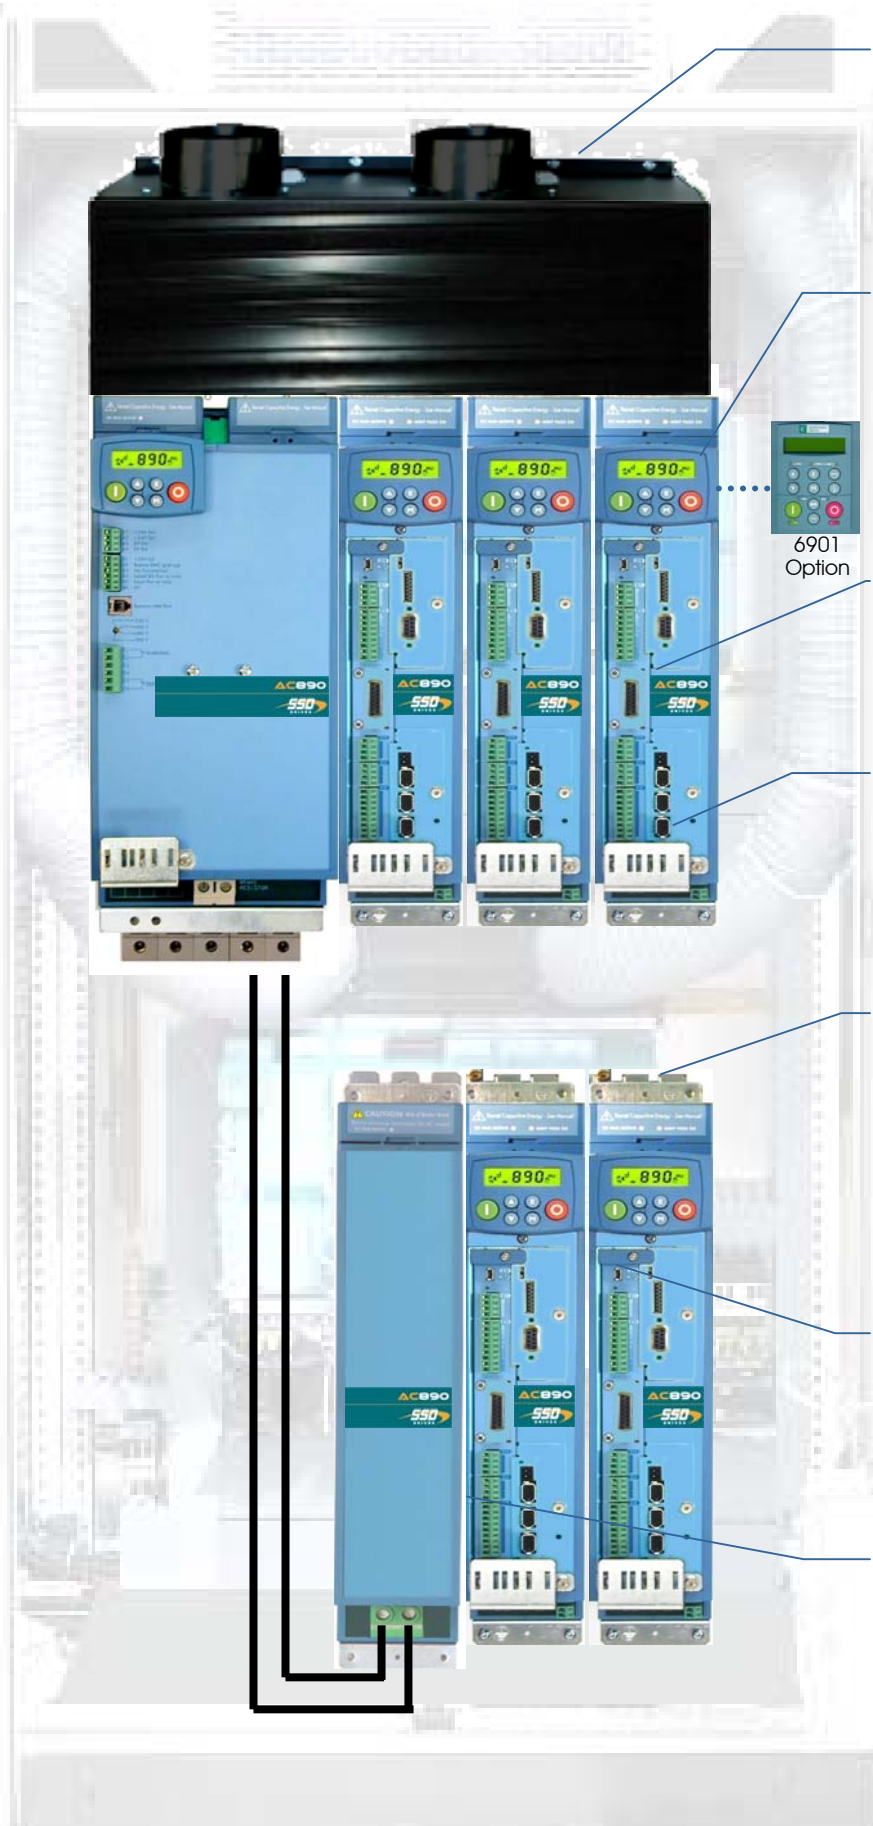

1



190 CFM Fan Kit



1 Meter Exhaust Duct

2



6511



6901




Remote Mount




3m Cable

3



Quadrature Encoder




Sin/Cos

4



5

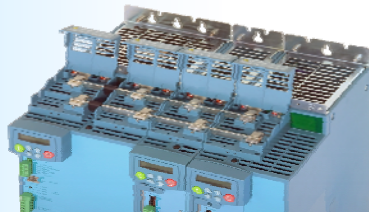


1m Lengths - 140 Amps Max

6




DSE Software

7



7a

without capacitance



7b

with capacitance

8



FireWire/1394 cables



Options and Accessories

Reference Number	Description	Catalog Number
1 Duct Kit		
1a	Duct Kit (1 Meter Exhaust Duct + 1 Fan Kit)	8905/DUCTKIT/190
1b	Fan Kit	8905/DUCTFAN/190
1c	Frame E & F Duct Kits	LA466717U004 (E) 003 (F)
2 Keypad Options		
2a	Alphanumeric Keypad	6901
2b	Remote Mounting Kit for 6901	6052/00
2c	Spare LCD Keypad	6511
3 Feedback Cards		
3a	Encoder Quadrature	8902/EQ/00/FF
3b	EnDat 2.1 Encoder (Sin/Cos, Heidenhain)	8902/E1/00/FF
3c	Hiperface Encoder Ref (Sin/Cos, Stegmann)	8902/HR/00/FF
3d	Resolver (Standard for Servo)	8902/RE/00/FF
4 Communication Expansion Boards		
4a	CanOpen Fieldbus	8903/CB/00/FF
4b	Controlnet Fieldbus	8903/CN/00/FF
4c	DeviceNet Fieldbus	8903/DN/00/FF
4d	EtherNet Fieldbus (IP)	8903/EN/00/FF
4e	Firewire 1394a, 890 LAN Comm's	8903/FA/00/FF
4f	ProfiBus DP Fieldbus	8903/PB/00/FF
5 Bus Bars		
5a	1 M Length, SSD Rail/ Bus Bar, 140 Amps	BH465850
6 Software		
6a	DSE 890 Lite CD w/Cable Kit	8906/DSELITE/00
6b	DSE 890 Run Time CD w/Cable Kit	8906/DSE RUN/00
6c	DSE 890 Development w/ Cable Kit	8906/DSEDEV/00
7 Common Bus Adapter		
7a	50HP, 80A DC, without Capacitance	890CA/5/0080B/N/00/N/EN
7b	40HP, 50A DC, with Capacitance	890CA/5/0050B/N/RT/N/EN
8 Firewire Cables		
8a	200 mm FireWire Cable	8905/FWCBL200/00
8b	280 mm FireWire Cable	8905/FWCBL280/00
8c	1000 mm FireWire Cable	8905/FWCBL1000/00
8d	4500 mm FireWire Cable	8905/FWCBL4500/00

Sales Offices

Australia

Parker Hannifin
Pty Ltd
9 Carrington Road
Private Bag 4, Castle Hill
NSW 1765
Tel: +61 2 9634 7777
Fax: +61 2 9899 6184

Belgium

Parker Hannifin SA NV
Parc Industriel Sud Zone 11
23, Rue du Bosquet
Nivelles B -1400 Belgium
Tel: +32 67 280 900
Fax: +32 67 280 999

Brazil

Parker Hannifin Ind. e Com. Ltda.
Av. Lucas Nogueira Garcez, 2181
Esperança - Caixa Postal 148
Tel: +55 0800 7275374
Fax: +55 12 3954 5262

Canada

Parker Motion and Control
160 Chisholm Drive
Milton
Ontario L9T 3G9
Tel: +1(905)693 3000
Fax: +1(905)876 1958

China

Parker Hannifin Motion & Control
(Shanghai)
Co. Ltd.
SSD Drives
280 Yunqiao Road
Export Processing Zone
Pudong District
Shanghai 201206
P.R.China
Tel: +86 (21) 5031 2525
Fax: +86 (21) 5854 7599

France

Parker SSD Parvex
8 Avenue du Lac
B.P. 249
F-21007 Dijon Cedex
Tel: +33 (0)3 80 42 41 40
Fax: +33 (0)3 80 42 41 23

Germany

Parker Hannifin GmbH
Von-Humboldt-Strasse 10
64646 Heppenheim
Germany
Tel: +49(0)6252 798200
Fax: +49(0)6252 798205

India

SSD Drives India Pvt Ltd
151 Developed Plots Estate
Perungudi,
Chennai, 600 096, India
Tel: +91 44 43910799
Fax: +91 44 43910700

Italy

Parker Hannifin SPA
Via Gounod 1
20092 Cinisello Balsamo
Milano
Italy
Tel: +39 02 361081
Fax: +39 02 36108400

Singapore

Parker Hannifin Singapore Pte Ltd
11, Fourth Chin Bee Rd
Singapore 619702
Tel: +65 6887 6300
Fax: +65 6265 5125

Spain

Parker Hannifin (Espana) S.A.
Parque Industrial Las Monjas
Calle de las Estaciones 8
28850 Torrejonde Ardoz
Madrid
Spain
Tel: +34 91 6757300
Fax: +34 91 6757711

Sweden

Parker Hannifin AB
Montörgatan 7
SE-302 60 Halmstad
Sweden
Tel: +46(35)177300
Fax: +46(35)108407

UK

Parker Hannifin Ltd.
Tachbrook Park Drive
Tachbrook Park
Warwick
CV34 6TU
Tel: +44(0)1926 317970
Fax: +44(0)1926 317980

USA

Parker Hannifin Corp.
SSD Drives Division
9225 Forsyth Park Drive
Charlotte
North Carolina 28273-3884
Tel: +1(704)588 3246
Fax: +1(704) 588-3249

Your local authorized Parker distributor

© 2008 Parker Hannifin Corporation. All rights reserved.

Catalog # HA467685U001 (Iss5 8/2008)



Parker Hannifin Corporation
SSD Drives Division
9225 Forsyth Park Drive, Charlotte,
North Carolina 28273-3884
Tel: (704) 588 3246 Fax: (704) 588 3249
sales.us.ssd@parker.com
www.parker.com www.ssddrives.com